



**Australia's Most
Beautiful Floors**



Genuine Appalachian Hickory

Elk Falls Hickory planks are manufactured from genuine North American Appalachian Hickory. It is an excellent durable hardwood ideally suited to flooring installations where strength & impact resistance are important considerations. Elk Falls Hickory flooring, a great choice for the rough and tumble of everyday life.

“
*Hickory Hardwood,
It's Hard to Beat!*”





RUSTIC NATURAL





Details That Matter

Elk Falls Hickory flooring provides a unique set of characteristics that make it ideal for use in residential homes, apartments and for commercial applications.

Hickory has been used for centuries in applications where its inherent strength and stiffness have been considered a major advantage in applications from timber engineered elements, cabinetry, sporting goods to everyday products such as axe handles. Hickory is extremely stable with excellent hardness characteristics, approx 9.5kN JANKA scale, similar to popular Australian timbers, Blackbutt and Jarrah.

- Engineered construction, Unilin patented click profile.
- Wear resistant pre-finished European water-based UV lacquer, matte sheen level.
- Hickory rustic grade, a natural look with lots of character and appeal.
- Visual appearance will suit those seeking a classic hardwood in a range of natural or stained décors.
- VOC emissions: <E1. Below World Health Organisation (WHO) levels. Allergy free.
- Australian fire and slip test certified. Suitable for install over hydronic in-slab heating only.



COPPER STILL

NATURAL

COLOUR RANGE

1900 x 189 x 14mm

2mm solid hickory wear layer

1900mm set length & nested shorts approx. 30%




Barley Malt



Bluegrass



Copper Still

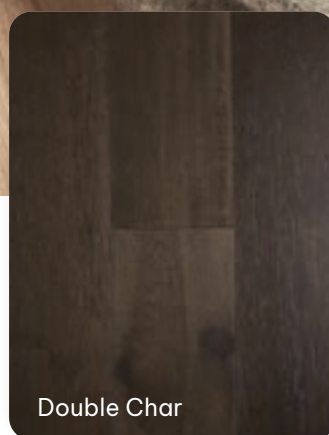

Double Char



Honey Mash



Moonshine



Natural



Roasted Vanilla




Rustic Eldorado



Rustic Natural



Snowdrift

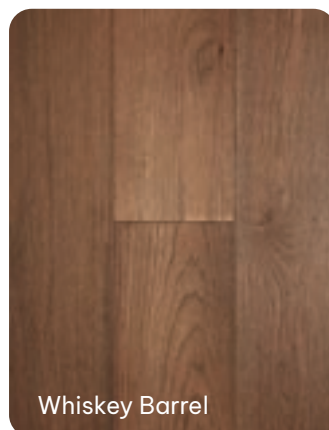

Whiskey Barrel



RUSTIC NATURAL



MOONSHINE

Technical Specifications

DESCRIPTION

Engineered multi-layer construction, solid hickory wear layer.

GRADE & SURFACE

A/B/C/D grade. Allows for rustic features, contains knots & splits that are filled to complement surface colour and character along with sapwood, raised grain and colour streaks that enhance its rustic charm. Light brushed surface, pre-finished European PU matte coating. P3 slip test certified.

PROFILE

Micro bevelled edges. Unilin patented click for fast and efficient floating install.

ACOUSTIC TEST OUTCOME

Sample installed on 2mm Ultra Green Underlay	NCC/BCA criterion	Test result L'nT,w	AAAC ⁵ star rating	FIIC ^{4,5}	Compliance with NCC/BCA
14mm Hickory Timber	L'nT,w<62	42 ✓	5	63	Yes ✓

Preference Floors (SA)
Adelaide
08 8262 2774
sa@preferencefloors.com.au

Preference Floors (WA)
Perth
08 9471 7785
wa@preferencefloors.com.au

Preference Floors (QLD)
Brisbane
07 3875 1688
qld@preferencefloors.com.au

Preference Floors (NSW)
Sydney
02 9738 1188
sales@preferencefloors.com.au

Preference Floors (VIC)
Melbourne
03 9794 5111
vic@preferencefloors.com.au

PREFERENCE  FLOORS
www.preferencefloors.com.au