

# ArmstrongFlooring™



**Queenstown™ Collection**  
*Laminate Plank*

Herne Bay | 125

# Queenstown™ Collection

## Laminate Plank

The Queenstown™ laminate flooring collection offers versatile style and performance, available in two ranges: Queenstown™ 1.2 and Queenstown™ 1.5. Both ranges showcase the same 12 beautiful timber inspired plank colours, designed to elevate any home interior.

Both laminate ranges feature a water resistant wear surface and an advanced locking system which fully seals the joints. Properly installed in accordance with the Armstrong Flooring Installation Instructions for use in areas subject to moisture, the floor surface is entirely watertight, preventing any migration of moisture through the locking system. In addition Queenstown™ 1.2 boasts a swell rate of under 10% providing resistance to core damage due to moisture for an extended period (up to 3 days). Queenstown™ 1.5 offers a swell rate of less than 5% providing even further resistance to core damage due to moisture for even longer periods.

Queenstown™ 1.2 planks measure 1215mm x 195mm and feature an AC3^ rated wear layer, while Queenstown™ 1.5 planks are slightly larger at 1515mm x 195mm and boast an AC4^ rated wear layer for greater durability. Built to be stylish and resilient, Queenstown™ is the perfect flooring solution for active households, including those with children and pets.

## Features & Benefits



### WATER RESISTANT CORE & SURFACE

1.2 swell rate is under 10% and  
1.5 swell rate is less than 5%



### EASY CLEAN

Low maintenance properties  
make cleaning easier




### SCRATCH RESISTANT

Protection so your floors  
look newer for longer




### STAIN RESISTANT

For peace of mind  
for life's mishaps



### HIGHLY DURABLE

Designed for foot traffic  
and offers longevity



### WATERTIGHT LOCKING SYSTEM

Ideal for spill prone  
areas such as kitchens\*



### FAMILY APPROVED

Ideal for everyday living so  
you can enjoy your floors



### PET FRIENDLY

Stress less with your furry  
friends running around

\*AC stands for Abrasion Class which means the products have been durability tested for abrasion and impact resistance. For residential applications, AC3 is considered heavy duty and AC4 is considered extra heavy duty.

\*Subject to proper installation and care and maintenance as set out in the Armstrong Flooring Installation Instructions and Cleaning and Care Instructions.



Queenstown™

## Spotted Gum

---

The rich and varied tones of Spotted Gum adds warmth yet character to interior spaces.





Queenstown™

**Blackbutt**

The straight grain and smooth texture of Blackbutt creates a clean, lineal look.



# Queenstown™ 1.2 and 1.5

## Colour Palette

1.2 plank size: 1215mm x 195mm x 8.0mm  
1.5 plank size: 1515mm x 195mm x 8.0mm



**Herne Bay** | 125

LRV 37.02



**Mount Eden** | 120

LRV 36.87



**Kingston** | 140

LRV 37.03



**Sandy Point** | 135

LRV 43.96



**Newtown** | 155

LRV 36.78



**Arrowtown** | 165

LRV 26.86



**Mount Cook** | 130

LRV 49.64



**Blackbutt** | 245

LRV 30.99

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only. All colours will display a strong variation of colour from plank to plank – refer to our [Colour Variation Factsheet](#)

It is recommended you view the actual product in store – visit our [AU Store Locator](#) or [NZ Store Locator](#)

# Queenstown™ 1.2 and 1.5

## Colour Palette

1.2 plank size: 1215mm x 195mm x 8.0mm  
1.5 plank size: 1515mm x 195mm x 8.0mm



**Riverwood** | 360

LRV 19.07



**Spotted Gum** | 350

LRV 18.91



**Roseneath** | 175

LRV 16.50



**Wellington** | 160

LRV 21.39

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only. All colours will display a strong variation of colour from plank to plank - refer to our [Colour Variation Factsheet](#)

It is recommended you view the actual product in store - visit our [AU Store Locator](#) or [NZ Store Locator](#)




# Queenstown™ 1.2 and 1.5

## Room Visualiser

Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking on your relevant country below.

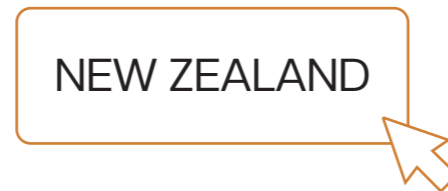

# Queenstown™ 1.2 and 1.5

## Technical Data

Product Classification	Queenstown™ 1.2	Queenstown™ 1.5
Type of floor covering	Laminate flooring	Laminate flooring
Warranty*	Residential 15 years	25 years
<small>*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see armstrongflooring.au or armstrongflooring.co.nz or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.</small>		
Physical Properties		
Colours (Standard)	12	12
Overall thickness (mm)	8.0	8.0
Wear rating	AC3	AC4
Bevel	Micro	Micro
Core type	HDF (860kg/m <sup>3</sup> )	HDF (860kg/m <sup>3</sup> )
Locking system	Angle/Angle - Side Tap (Manufactured under license from Unilin BV)	Angle/Angle - Side Tap (Manufactured under license from Unilin BV)
Backing type	Balancing layer	Balancing layer
Dimensions (mm)	1215 x 195	1515 x 195
Planks/carton	8	8
m <sup>2</sup> /carton	1.90	2.36
m <sup>2</sup> /pallet	133	165.2
kg/carton	14.0	18.0

### Installation

To current Armstrong Flooring Laminate Flooring Installation Instructions

### Sustainability

TVOC Emissions Compliant with Green Building Council low emitting VOC emission rates

### Technical Performance

Slip Resistance	AS 4586 Wet Pendulum (Appendix A)	P3	P3
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m <sup>2</sup> ≤ 750%.min	≥ 4.5kW/m <sup>2</sup> ≤ 750%.min
Other	ISO 24336 Thickness swell ISO 4760 Surface swell and recovery swell	< 10% No change	< 5% No change

### Accreditation

Manufactured under accredited ISO 9001 quality and ISO 14001 environmental management systems

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au or armstrongflooring.co.nz  
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.  
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.

Learn more

[www.armstrongflooring.au/queenstown](http://www.armstrongflooring.au/queenstown)



[www.armstrongflooring.co.nz/queenstown](http://www.armstrongflooring.co.nz/queenstown)



**Armstrong**Flooring™

**Australia**

29-39 Mills Road, Braeside VIC 3195  
1800 632 624  
customerservices@armstrongflooring.au  
www.armstrongflooring.au

**New Zealand**

39/332 Great North Road, Grey Lynn, Auckland 1021  
0800 449 649  
customerservices@armstrongflooring.co.nz  
www.armstrongflooring.co.nz